


Core thickness (mm)	45	60	70	80	100
R-Value (m ² K/W)	2.31	3.09	3.60	4.15	5.15
Weight kg/m ² 0.63/0.4 steel	11.5	12.1	12.5	12.9	13.7


Specification Selector - KS1000 Optimo™

Standard Environment	Temp. Control	Hygiene	High Humidity	Low Temp.	Low Pitch Roof	Fire Rating LPCB	Fire Rating FM	Enhanced Acoustics	Refurb
✓	✓	✓	✓	N/A	N/A	✓	✓	✓	✓


KS1000 Optimo-A




KS1000 Optimo-B

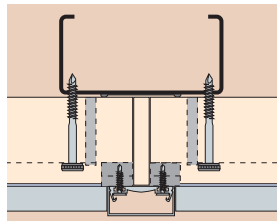



KS1000 Optimo-C

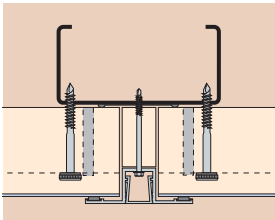

KS1000 Optimo-C

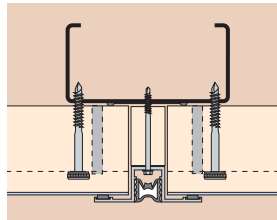

KS1000 Optimo-D*

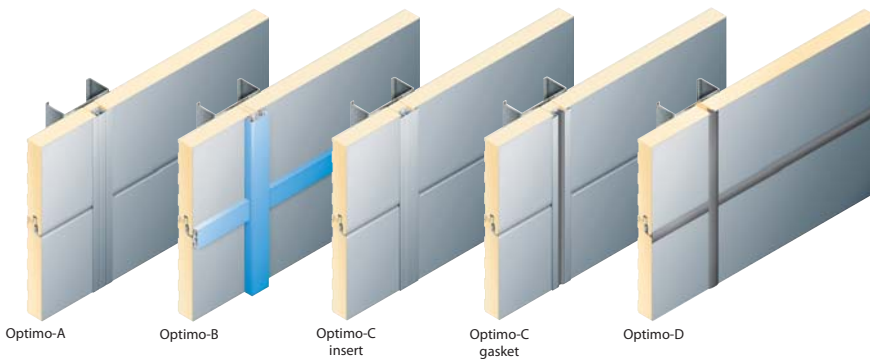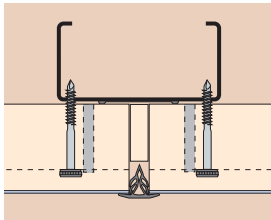

For further technical information, please contact Kingspan Technical Services on (03) 358 7536